

WARNING

Obtain, read and carefully service instructions when installing parts. A loose, worn, or damaged parts may cause injury to the rider. We strongly recommend that only genuine Shimano replacement parts be used.

SERVICE INSTRUCTIONS

SI-6C60A

**ST-3300-7
ST-3303-7**

Shimano Total Integration

Before use, read these instructions carefully, and follow them for correct use.

SHIMANO
TOTAL
INTEGRATION

Shimano Total Integration Features

The Shimano Total Integration features a dual action control lever which actuates the brakes like a conventional brake lever, and shifts the gears when moved inward toward the center line of the bicycle. Gear shifting is now possible without ever taking your hands off the brake hoods or drops.

In order to realize the best performance, we recommend that the following combination be used.


Shifting lever	F	ST-3300-7	ST-3303-7
	R	ST-3300-7	ST-3300-7
Outer casing		SIS-SP40	
Gears		14	21
Front derailleur		FD-3300	FD-3303
Front chainwheel		FC-3300	FC-3303
Bottom bracket		BB-UN52	
Rear derailleur		RD-3300-SS	RD-3300-GS
Freehub		FH-3300	
Cassette sprocket		CS-HG50-7	
Chain		CN-HG50	
Bottom bracket cable guide		SM-SP17	

Note

- For smooth operation, always be sure to use the specified outer casing and the bottom bracket cable guide.
- Grease the inner cable and the inside of the outer casing before use to ensure that they slide properly.
- Because of the high cable resistance of a frame with internal cable routing would impair the SIS function, this type of frame should not be used.
- Operation of the levers related to gear shifting should be made only when the front chainwheel is turning.
- Turn the reach adjustment bolt with a flat-tipped screwdriver having a tip width of 3mm and a thickness of 0.5mm.
- For any questions regarding methods of installation, adjustment, maintenance or operation, please contact a professional bicycle dealer.



Operation

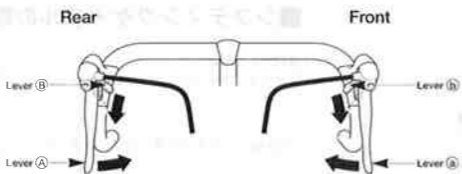


Lever (A): Shifts from smaller to larger rear sprocket.
Lever (B): Shifts from larger to smaller rear sprocket.
Lever (A): Shifts from smaller to larger chainring.
Lever (B): Shifts from larger to smaller chainring.


All levers return to the starting position when released.

Operation of rear derailleur lever


Lever (A): Shifts from smaller to larger rear sprocket. Lever (A) has a click stop at positions 1 and 2.

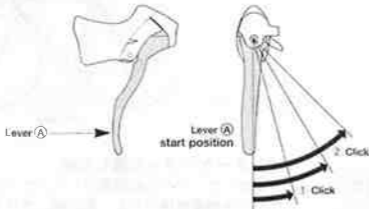


1: Shifts one sprocket
E.x.: from 3rd to 4th




2: Quick-shifts two sprockets
E.x.: from 3rd to 5th



Lever (B): Shifts from larger to smaller rear sprocket. Press lever (B) once to shift from a larger to one smaller sprocket.



E.x.: from 4th to 3rd



Caution on operation


Be careful not to apply pressure to lever (B) when operating lever (A). Similarly, be careful not to press lever (A) when operating lever (B). Gears will not shift when both levers are pressed simultaneously.

Be sure to read these service instructions in conjunction with the service instructions for the RD-3300-SS / RD-3300-GS before use.

ST-3300-7

Operation of front derailleur levers (FD-3300)


Lever (A): Shifts from smaller to larger front chainring.

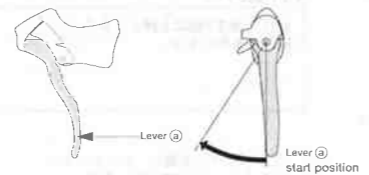


If operation of lever (A) does not complete the chainring shift stroke, operate lever (A) again for the distance (X') to complete that part of the lever stroke (X) which was short.



Lever (B): Shifts from larger to smaller front chainring.



When lever (B) is operated, there is one click where trimming (the noise prevention mechanism) engages, and a second stronger click when the gear shift stroke is completed. After trimming, the next push will complete the gear shift stroke to the smaller front chainring.




Trimming (noise prevention operation)
If the chain is on the large front chainwheel and the larger rear sprocket, the chain will rub in the front derailleur plate, producing a characteristic noise. When this happens, press lever (B) lightly (to the point where it clicks); this causes the front derailleur to move slightly towards the smaller chainwheel, thereby eliminating the noise.



ST-3303-7

Operation of front derailleur levers (FD-3303)

Lever (A): Shifts from smaller to larger front chainring.

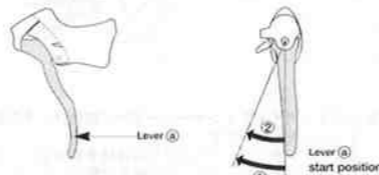

Lever (B): Shifts from largest chainring to intermediate chainring.



Lever (B): Shifts from intermediate chainring to smallest chainring.



Caution on operation (FD-3300/FD-3303)

But be careful not to apply pressure to lever (B) when operating lever (A). Similarly, be careful not to press lever (A) when operating lever (B). Gears will not shift when both levers are pressed simultaneously.

Be sure to read these service instructions in conjunction with the service instructions for the FD-3300 / FD-3303 before use.

Installation

Installation to the handlebar

Secure the assembly with the installation nut on the outside of the bracket. Pull the bracket cover back and use a 5 mm Allen key to tighten the bolt.




Tightening torque:
6 - 8 Nm (50 - 70 in. lbs.)

Installation of the brake cable


- Cable used
- Inner cable (stainless steel) $\phi 1.8$ mm
- SLR outer casing $\phi 5$ mm

Be sure to leave some excess cable, even if cutting it to the full length of the handlebars.


1. Tilt the lever in (as when shifting) to make it easier to pass the cable through the cable hook.

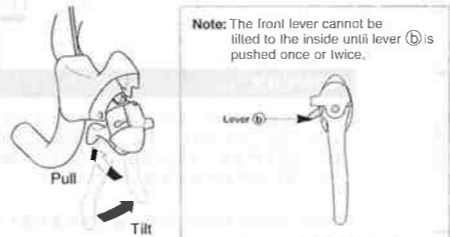


2. Pass the inner cable through.




3. Fix the outer guide to the inner cable, and set the angled member in the bracket.
Note: Do not wipe the grease on the inner cable off. Also, be careful that the inner cable does not pick up dust and foreign matter.

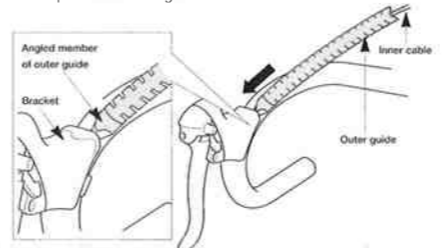

4. Set the outer casing on the inner cable, and in the bracket along the outer guide.

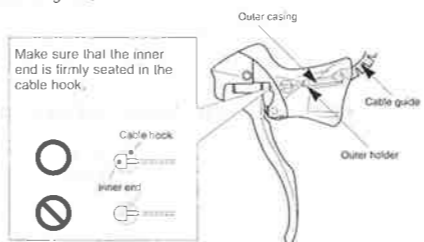


5. Bring the outer casing along the front of the handlebar and cover it with the outer guide. Now cut the outer guide to the length of the handlebar, and tape it temporarily in place.



6. Finally, wrap the handlebar with the finish tape.

Installing the shifting cable

- Cable used
- Inner cable (stainless steel) $\phi 1.2$ mm
- SP40 sealed outer casing (1) $\phi 4$ mm
- SP40 outer casing (2) $\phi 4$ mm



Inserting the inner cable

Insert the inner cable into the outer casing from the end with the marking on it. Apply grease from the end with the marking in order to maintain cable operating efficiency.



Cutting the outer casing

When cutting the outer casing, cut the opposite end to the end with the marking on it. After cutting the outer casing, make the end round so that the inside of the hole has a uniform diameter.




Attach the same outer end cap to the cut end of the outer casing.




Rear lever

Push lever (B) at least 7 times to make sure the mechanism is in top gear before installing.




Depress the brake lever, and then pass the inner cable through the cable hole.



If the cable hook does not align with the shifting cable hole, press lever (B) again until it does, and then install the cable.




Make sure that the inner end is firmly seated in the cable hook.

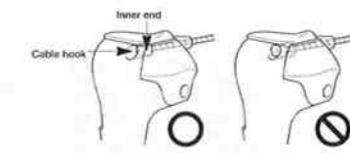


Front lever


Push lever (B) at least two - three times before installing.



Pull the brake lever (as when braking) to pass the inner cable through the shifting cable hole, and set it in the outer casing.




- Outer stopper
- 1. Install the outer stopper to the down tube.

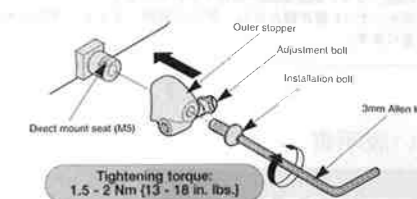


Install with the adjustment bolt tightened. The adjustment range for the adjustment bolt is six full turns.

2. Pass the inner cable through, and set the outer casing.

Be sure leave some excess in the outer casing, even if cutting it to the full length of the handlebars.




Confirm
Make sure the outer casing is firmly seated in the outer stopper.



Replacing the bracket cover

The tabs on the bracket cover each fit to a matching slot on the bracket.



Note the markings:
R: for right
L: for left

Wipe a little rubbing alcohol inside the bracket cover to make installation easier.

SHIMANO

SHIMANO AMERICAN CORPORATION
One Holland Irvine CA 92618 U.S.A. Phone 949-951-5003

SHIMANO EUROPA
Industrieweg 24 NL-8071 CT Nunspeet Holland Phone 31-341-27222

SHIMANO INC.
77 Oimatsu-cho 3-cho Sakai Osaka 590-5577 Japan Phone 0722-23-0243

Please note: specifications are subject to change for improvement without notice. (English)
© Sep. 1999 by Shimano Inc., XBC SZK Printed in Japan.

These service instructions are printed on recycled paper and can be recycled again.