

General Safety Information

WARNING

- Obtain and read the service instructions carefully prior to installing the parts. Loose, worn, or damaged parts may cause injury to the rider. We strongly recommend only using genuine Shimano replacement parts.
- Read these Technical Service Instructions carefully, and keep them in a safe place for later reference.


Note

- Operation of the levers related to gear shifting should be made only when the front chainwheel is turning.
- For smooth operation, use the specified outer casing and the bottom bracket cable guide.
- Grease the inner cable and the inside of the outer casing before use to ensure that they slide properly.
- Use a frame with internal cable routing is strongly discouraged as it has tendencies to impair the SIS shifting function due to its high cable resistance.
- Turn the reach adjustment bolt with a flat-tipped screwdriver having a tip width of 3mm and a thickness of 0.5mm.
- Parts are not guaranteed against natural wear or deterioration resulting from normal use.
- For maximum performance we highly recommend Shimano lubricants and maintenance products.
- For any questions regarding methods of installation, adjustment, maintenance or operation, please contact a professional bicycle dealer.




Operation of rear derailleur lever


- Lever (A) : Shifts from smaller to larger rear sprocket. Lever (A) has a click stop at positions (1) and (2).

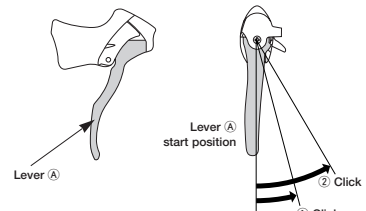


- (1) : Shifts one sprocket
E.x. : from 3rd to 4th




- (2) : Quick-shifts two sprockets
E.x. : from 3rd to 5th



- Lever (B) : Shifts from larger to smaller rear sprocket. Press lever (B) once to shift from a larger to one smaller sprocket.



E.x. : from 4th to 3rd



Caution on operation

Be careful not to apply pressure to lever (B) when operating lever (A). Similarly, be careful not to press lever (A) when operating lever (B). Gears will not shift when both levers are pressed simultaneously.

Be sure to read these service instructions in conjunction with the service instructions for the RD-2200 before use.

Technical Service Instructions

SI-6LX0B

ST-2200
ST-2203

Shimano Total
Integration

SHIMANO
TOTAL
INTEGRATION


Shimano Total Integration Features

The Shimano Total Integration 2200 series features a dual action control lever which actuates the brakes like a conventional brake lever, and shifts the gears when moved inward toward the center line of the bicycle. Gear shifting is now possible without ever taking your hands off the brake hoods or drops.

In order to realize the best performance, we recommend that the following combination be used.

Series	2200		
Shifting lever	Front	ST-2200	ST-2203
	Rear	ST-2200	ST-2200
Outer casing	SIS-SP40		
Gears	16	24	
Front derailleur	FD-2200	FD-2203	
Front chainwheel	FC-2200	FC-2203	
Bottom bracket	BB-UN26		
Rear derailleur	RD-2200		
Freehub	FH-2200		
Cassette sprocket	CS-HG50-8		
Chain	CN-HG50 / CN-HG40		
Bottom bracket cable guide	SM-SP17 / SM-SP18		

Operation

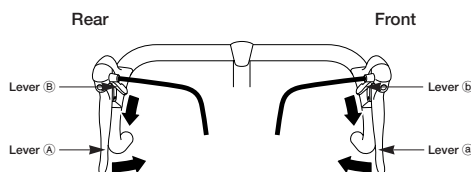


- Lever (A) : Shifts from smaller to larger rear sprocket.
- Lever (B) : Shifts from larger to smaller rear sprocket.
- Lever (A) : Shifts from smaller to larger chainring.
- Lever (B) : Shifts from larger to smaller chainring.

All levers return to the starting position when released.

< ST-2200 >

When lever (b) is operated, there is one click where trimming (the noise prevention mechanism) engages, and a second stronger click when the gear shift stroke is completed. After trimming, the next push will complete the gear shift stroke.



Trimming (noise prevention operation)

If the chain is on the large front chainring and the larger rear sprocket, the chain will rub in the front derailleur plate, producing a characteristic noise. When this happens, press lever (b) lightly (to the point where it clicks); this causes the front derailleur to move slightly towards the smaller chainring, thereby eliminating the noise.




Caution on operation (FD-2200/FD-2203)

But be careful not to apply pressure to lever (b) when operating lever (a). Similarly, be careful not to press lever (a) when operating lever (b). Gears will not shift when both levers are pressed simultaneously.


< ST-2203 >

When lever (a) is operated, there is one click where trimming (the noise prevention mechanism) engages, and a second stronger click when the gear shift stroke is completed. After trimming, the next push will complete the gear shift stroke.



Trimming (noise prevention operation)


If the chain is on the smallest front chainring and a smaller rear sprocket, the chain will rub in the front derailleur plate, producing a characteristic noise. When this happens, press lever (a) lightly (to the point where it clicks); this causes the front derailleur to move slightly towards the larger chainring, thereby eliminating the noise.

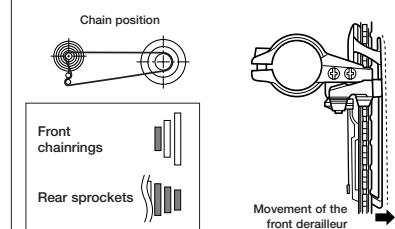

Installation

Installation to the handlebar

Secure the assembly with the installation nut on the outside of the bracket. Pull the bracket cover back and use a 5 mm Allen key to tighten the bolt.



Tightening torque:
6 - 8 N·m (50 - 70 in. lbs.)


Installation of the brake cable

Cable used

- Inner cable (stainless steel) : $\phi 1.6$ mm
- SLR outer casing : $\phi 5$ mm


Be sure to leave some excess cable, even if cutting it to the full length of the handlebars.

- Tilt the lever in (as when shifting) to make it easier to pass the cable through the cable hook.

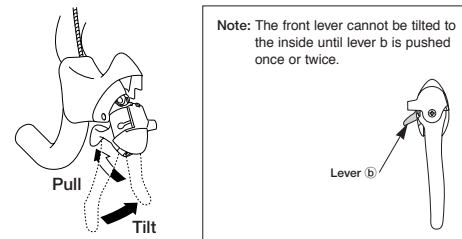


Note: The front lever cannot be tilted to the inside until lever b is pushed once or twice.



- Pass the inner cable through.




- Fix the outer guide to the inner cable, and set the angled member in the bracket.
Note: Do not wipe the grease on the inner cable off. Also, be careful that the inner cable does not pick up dust and foreign matter.

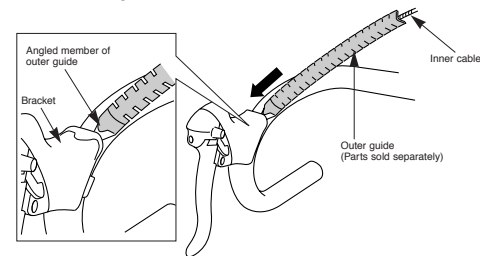

- Set the outer casing on the inner cable, and in the bracket along the outer guide.

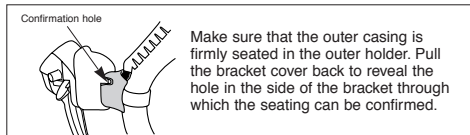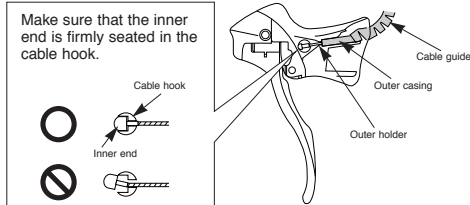

- Bring the outer casing along the front of the handlebar and cover it with the outer guide. Now cut the outer guide to the length of the handlebar, and tape it temporarily in place.





- Finally, wrap the handlebar with the finish tape.

Installing the shifting cable

Cable used

- Inner cable (stainless steel) : $\phi 1.2$ mm
- SP40 sealed outer casing (1) : $\phi 4$ mm
- SP40 outer casing (2) : $\phi 4$ mm



Inserting the inner cable

Insert the inner cable into the outer casing from the end with the marking on it. Apply grease from the end with the marking in order to maintain cable operating efficiency.




Cutting the outer casing

When cutting the outer casing, cut the opposite end to the end with the marking. After cutting the outer casing, make the end round so that the inside of the hole has a uniform diameter.




Attach the same outer end cap to the cut end of the outer casing.




Rear lever

Push lever (B) at least 7 times to make sure the mechanism is in top gear before installing.




Depress the brake lever, and then pass the inner cable through the cable hole.



If the cable hook does not align with the shifting cable hole, press lever (B) again until it does, and then install the cable.




Make sure that the inner end is firmly seated in the cable hook.




Front lever

Push lever (b) at least two - three times before installing.




Depress the brake lever, and then pass the inner cable through the cable hole.



Outer stopper

- Install the outer stopper to the down tube.

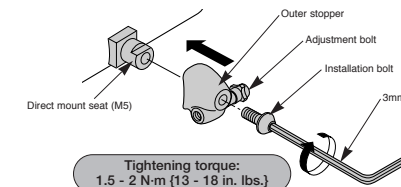


Tightening torque:
1.5 - 2 N·m (13 - 18 in. lbs.)


Install with the adjustment bolt tightened. The adjustment range for the adjustment bolt is six full turns.

- Pass the inner cable through, and set the outer casing.

Be sure leave some excess in the outer casing, even if cutting it to the full length of the handlebars.




Confirm
Make sure the outer casing is firmly seated in the outer stopper.



Replacing the bracket cover

The tabs on the bracket cover each fit to a matching slot on the bracket.



Note the markings:
R : for right
L : for left
Wipe a little rubbing alcohol inside the bracket cover to make installation easier.

SHIMANO

SHIMANO AMERICAN CORPORATION
One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003

SHIMANO EUROPE B.V.
Industrieweg 24, 8071 CT Nunspeet, The Netherlands Phone: +31-341-272222

SHIMANO INC.
3-77 Oimatsu-cho, Sakai-shi, Osaka 590-8577, Japan
Please note: specifications are subject to change for improvement without notice. (English)
© Jan. 2006 by Shimano Inc. XBC SZK Printed in Singapore.