

BR-M739 Tune-Up Kit

Before use, read these instructions carefully, and follow them for correct use.


Contents of kit:

- Axle fixing bolt (E) × 2
- Axle cap (F) × 4
- SUS adjusting shim (D) × 8
(t=0.05 mm × 2 / 0.1 mm × 2 / 0.2 mm × 2 / 0.3 mm × 2)

DIRECTIONS:

1. First, remove the axle caps (A) at both ends of the shoe fixing link. Then remove the axle fixing bolt (B) and take out the axle (C).
2. Apply grease to the SUS adjusting shims (D), and then insert the SUS adjusting shims (D) between the link body and the bushing. Insert as many SUS adjusting shims (D) as possible while still allowing the shoe fixing link to move smoothly.
3. Apply grease to the axle (C), and then install it and secure it with the new axle fixing bolt (E). Screw the axle fixing bolt (E) in securely so that the end goes into the groove in the axle (C). **If the axle fixing bolt (E) is not screwed in tightly enough, there is the danger that the axle (C) may come out.**
4. Check that the axle (C) is not protruding from the surfaces where the new axle caps (F) will be attached and that the attachment surfaces are not contaminated with grease or other lubricants. Then attach the new axle caps (F) to both ends of the shoe fixing link.

Tightening torque:
2 Nm {17 in. lbs.} or more

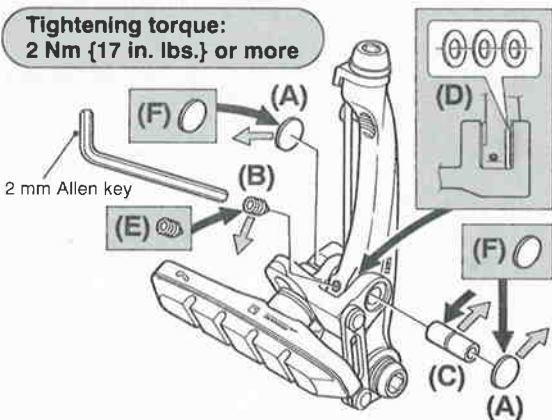

Please note: Specifications are subject to change for improvement without notice. (English)

SHIMANO®

SHIMANO AMERICAN CORPORATION

One Shimano Drive, P.O. Box 19615, Irvine, California U.S.A. 92713-9615 Phone 714-951-5093

SHIMANO EUROPA

Industrieweg 24 NL-6071 CT Nunspeet, Holland Phone 31-3412-72222

SHIMANO INC.

3-77 Oimatsucho, Sakai, Osaka, Japan Phone 0722-23-3243



These service instructions are printed on recycled paper and can be recycled again.