

User's Manual

SPD Pedals



Contents

IMPORTANT NOTICE..... 3

Important safety information 4

Notice..... 6

Regular inspections before riding the bicycle 7

Names of parts..... 8

Cleat types, and using the cleats 9

Adjusting the cleat retention force of the pedals 13

Replacing cleats, replacing body covers..... 15

IMPORTANT NOTICE

- Contact the place of purchase or a distributor for information on installation, adjustment, and replacement of the products which are not found in the user's manual. A dealer's manual for professional and experienced bicycle mechanics is available on our website (<https://si.shimano.com>).

For safety, be sure to read this user's manual thoroughly before use, follow it for correct use, and store it so that it can be referenced at any time.

The following instructions must be observed at all times in order to prevent personal injury and physical damage to equipment and surroundings. The instructions are classified according to the degree of danger or damage which may occur if the product is used incorrectly.

	DANGER	Failure to follow the instructions will result in death or serious injury.
	WARNING	Failure to follow the instructions could result in death or serious injury.
	CAUTION	Failure to follow the instructions could cause personal injury or physical damage to equipment and surroundings.

Important safety information

WARNING

- In order to ensure child safety for children using this product, children should be given instruction on the correct use after both guardians and children have fully understood the following information. Failure to follow this instruction may lead to serious injury.
- Do not disassemble or modify the product. This may cause the product to not operate correctly, and you may suddenly fall and be seriously injured.
- Before attempting to ride with these pedals and cleats (shoes), make sure you understand the operation of the engagement and release mechanism. SPD pedals are designed to be released only when intended. They are not designed to be released automatically when you have fallen off the bicycle.
- Use only SPD-compatible shoes with this product. Other types of shoes may not release from the pedals, or may release unexpectedly.
- Use only SHIMANO cleats (CL-MT001 / SM-SH51 / SM-SH56)* and make sure that the fixing bolts are tightened securely to the shoes. Failure to securely tighten the bolts may result in a fall in which the cleats do not release.
- Before attempting to ride with these pedals and cleats, apply the brakes, then place one foot on the ground and practice engaging and releasing each cleat from its pedal until you can do so naturally and with minimal effort.
- Ride on level ground first until you become accustomed to engaging and releasing your cleats from the pedals.
- Before riding, adjust the cleat retention force of the pedals to your liking. If the cleat retention force of the pedals is low, the cleats may become accidentally released and you may lose balance and fall off the bicycle. If the cleat retention force of the pedals is high, the cleats cannot be easily released.
- When riding at low speed or when there is a possibility that you might need to stop riding (for example, when doing a U-turn, nearing an intersection, riding uphill, or turning a blind curve), release your cleats from the pedals beforehand so that you can quickly put your feet onto the ground at any time.
- Use a lighter cleat retention force for attaching the pedal cleats when riding in adverse conditions.
- Keep cleats and bindings out of dirt and debris to ensure proper engagement and release.
- Remember to check the cleats periodically for wear. When the cleats are worn, replace them, and adjust the cleat retention force before riding and after replacing the pedal cleats.

If the warnings above are not followed, your shoes may not come out of the pedals when you intend or they may come out unexpectedly or accidentally, and severe injury may result.

- Be sure to attach reflectors to the bicycle when traveling on public roads. Reflectors are sold separately for models that do not come with reflectors equipped as standard. For information on compatible reflectors, contact the place of purchase or a distributor.
- Do not continue riding the bicycle if the reflectors are dirty or damaged. Otherwise, it becomes more difficult for oncoming vehicles to see you.

<Models with pins for adjusting gripping force>

- If you are not sure about how to adjust the pins on the pedals, consult your place of purchase or a distributor.

- Raise your feet from the pedals then slide them sideways to disengage your feet from the pedals. With one foot firmly on the ground, practice engaging and disengaging the other foot from the pedal repeatedly until you become used to the operation, otherwise, you may fall and be seriously injured. If you cannot get used to this operation, use the product with spacers installed.
- Be sure to wear clothing and protective gear which is suitable for the way in which the bicycle is to be used. Because the pins are long, they may cause injury if they come into direct contact with your skin.

Notice

- If pedaling performance does not feel normal, perform an inspection again.
- If you experience any trouble with the bearing section of the pedal, the pedal may require adjustment. Consult your place of purchase or a distributor.
- Products are not guaranteed against natural wear and deterioration from normal use and aging.
- For maximum performance we highly recommend SHIMANO lubricants and maintenance products.




Regular inspections before riding the bicycle

Before riding the bicycle, check the following items. If any problems are found, consult your place of purchase or a distributor.

- Are the fastening sections fixed securely?
- Has excess play increased between the cleat and pedal due to wear?
- Are there any abnormalities when the cleat engages or releases?
- Are there any abnormal noises?

Names of parts

* The shape of the pedals and included pins and spacers differ depending on the model.

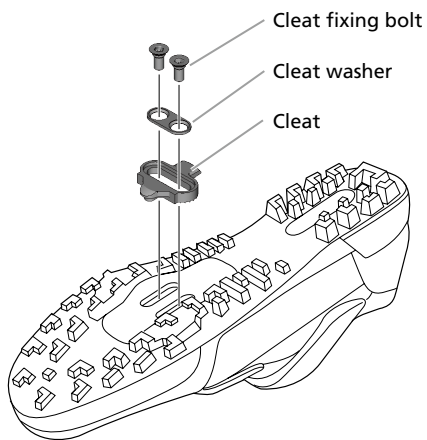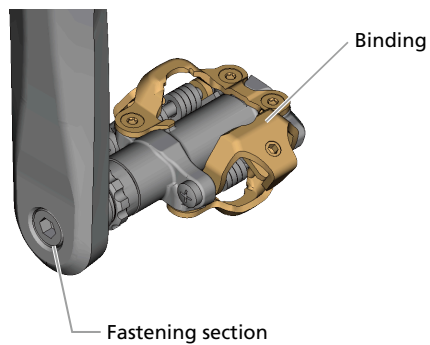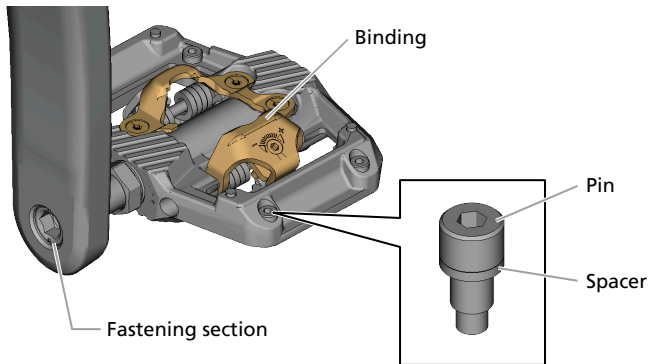


Cleat types, and using the cleats

Types of cleats

⚠ WARNING

- Do not use the pedals or cleats in any way not described in the user's manual. When the cleat and pedal are facing forwards, the cleat can be released and engaged with the pedal.
Read the user's manual carefully for instructions on using the cleats. Failure to follow the instructions may lead to serious injury.



This product supports the following cleats:
The engagement mode and release mode vary depending on the type of cleats being used.





Type of cleats being used	Engagement mode	Release mode
CL-MT001 (Black)	Multiple entry mode	Single release mode
SM-SH51 (Black)	Single entry mode	Single release mode
SM-SH56 (Silver, Gold)	Single entry mode	Multiple release mode

Read the manual and chose the correct type for your needs, based on a consideration of your riding style, riding terrain, and conditions.
The included cleat differs depending on the model.
Cleats such as the single release mode cleats (SM-SH52) and multiple release mode cleats (SM-SH55) cannot be used as they lack certain features, such as stable step-out performance and sufficient retention force.

Operating instructions

How to engage



The engagement mode can be selected depending on the type of cleat being used. (Check the cleat model number and color for the appropriate engagement method.)

Single entry mode: SM-SH51 (Black) / SM-SH56 (Silver, Gold)	Multiple entry mode: CL-MT001 (Black)
Press the cleats into the pedal binding from a diagonally downward direction. 	Press the cleats into the pedal binding from a diagonally downward direction. 
	Press the cleats into the pedal binding from above. 
	Press the cleats into the pedal binding from a diagonally upward direction. 

How to release

The release mode can be selected depending on the type of cleat being used.

(Check the cleat model number and color for the appropriate release method.)

Single release mode: CL-MT001 (Black) / SM-SH51 (Black)	Multiple release mode: SM-SH56 (Silver, Gold)
Only release when the heel is moved outward . They will not release if the heel is twisted in any other direction. 	Can be released by twisting in any direction. 

Single release mode: CL-MT001 (Black) / SM-SH51 (Black)	Multiple release mode: SM-SH56 (Silver, Gold)
Upward force may be applied to the pedal, since the cleat will not release unless the foot is twisted.	The cleat may release in an upward direction. Therefore, pulling up on the pedal may result in the cleat unexpectedly disengaging. Therefore, do not use this cleat if you pull up on the pedals when riding, or if you perform jumps or similar in which forces act on the foot in the direction of cleat release.
The cleats will not necessarily release if you lose your balance. Accordingly, for places and conditions where it looks as though you may lose balance, make sure that you have sufficient time to release the cleats beforehand.	Although the cleats do release in directions other than the horizontal, they will not necessarily release if you lose your balance. Accordingly, for places and conditions where it looks as though you may lose balance, make sure that you have sufficient time to release the cleats beforehand.
When, for example, you are pedaling vigorously, your heel may inadvertently twist sideways and this may cause the cleat to release accidentally. Once you have adjusted the cleats, practice engaging and releasing until you are fully familiar with the amount of force and foot angle required. An unexpected release may cause you to fall off the bicycle and serious injury may result.	If the characteristics of multiple release mode cleats are not sufficiently understood or used correctly, they are more likely than single release mode cleats to release unexpectedly. Once you have adjusted the cleats, practice engaging and releasing until you are fully familiar with the amount of force required in each direction. An unexpected release may cause you to fall off the bicycle and serious injury may result.


NOTICE

- It is necessary to practice releasing until you become accustomed to the technique.
 - * In multiple release mode, releasing by lifting your heel requires particular practice.


When installing cleat spacers

- The cleat spacer is only compatible with SHIMANO cleats (CL-MT001 / SM-SH51 / SM-SH56).
- When using spacers, use only one per SPD compatible shoe.
- The cleat spacer is not included, depending on the model.

- Only use cleat spacers in the following cases.
 - If smooth engagement of the shoes with the pedals is prevented, because the blocks on the shoe soles are high and this causes them to get caught on the pedals.
 - If smooth engagement of the shoes with the pedals is prevented, because dirt and debris build up on the shoe soles or pedals.

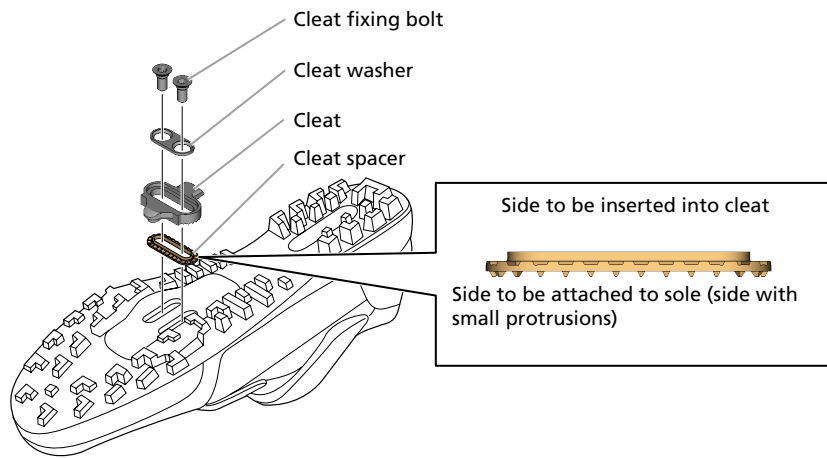

Adjusting the cleat retention force of the pedals


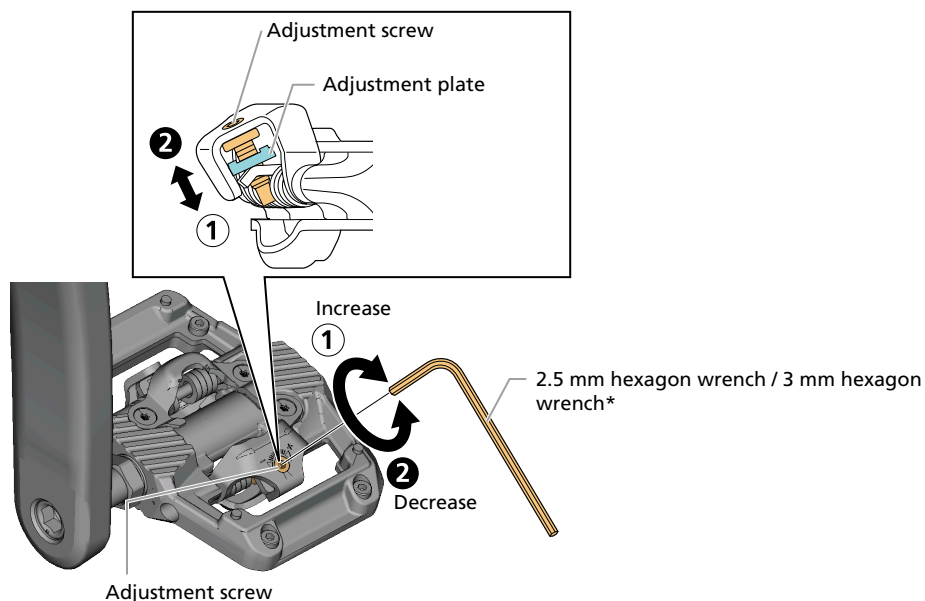


* The hexagon wrench to be used differs depending on the model.

- To adjust the cleat retention force, adjust the spring tension of the pedals by turning the adjustment screw.
- Clicking the adjustment screw once changes the tension one step. There are four clicks per turn.
- The adjustment screw is located at the rear of each binding, resulting in four positions in total for the two pedals.
- Adjust the spring force to the optimal cleat retention force when releasing the cleats from the bindings.
- Equalize the cleat retention forces at the four positions by checking the adjustment plate position and counting the number of turns of the adjustment screws.
- Turning the adjustment screw clockwise increases the cleat retention force, and turning it counterclockwise decreases it.

Strongest position

Weakest position



If the adjustment plate is at the strongest or the weakest position, do not turn the adjustment screw any further.


NOTICE

- In order to prevent accidental cleat release and ensure that release is possible when needed, make sure that the cleat retention force is properly adjusted.
- If the cleats are not adjusted equally, it can cause the rider difficulty in engaging or releasing the cleats. The cleat retention force for the right and left pedals should be adjusted so they are equal.

Replacing cleats, replacing body covers

Cleats and body covers become worn and need to be replaced periodically.

When, due to wear, the cleat release starts to become too tight or too loose, immediately contact the place of purchase or a distributor and replace the cleats and body covers with new ones.

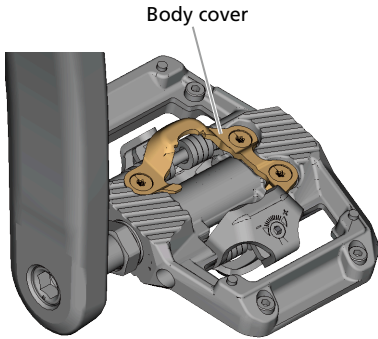

SHIMANO

SHIMANO NORTH AMERICA BICYCLE, INC.
One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003

SHIMANO EUROPE B.V.
High Tech Campus 92, 5656 AG Eindhoven, The Netherlands Phone: +31-402-612222
Only EU General Contact : contactshimano@shimano-eu.com

SHIMANO INC.
3-77 Oimatsu-cho, Sakai-ku, Sakai City, Osaka 590-8577, Japan