

# SERVICE INSTRUCTIONS SI-3A20B

## FH-MX66

Freehub

Before use, read these instructions carefully, and follow them for correct use.

In order to realize the best performance, we recommend that the following combination be used.

## Specifications

### Freehub

Model No.	FH-MX66
Sprocket	1
No. of spoke holes	36H
Overlock nut dimensions	112 mm
Chain line	43 mm

### Cassette sprocket


Model No.	CS-MX66
Sprocket tooth configuration	14T, 15T, 16T, 18T

### Note


- Use CS-MX66 as the cassette sprocket.
- The sprocket, the sprocket spacer and the lock ring has a stamp. The side with a stamp is the front side.

## Installation of the sprockets

Install as shown in the illustration below.  
(Chain line 43 mm)

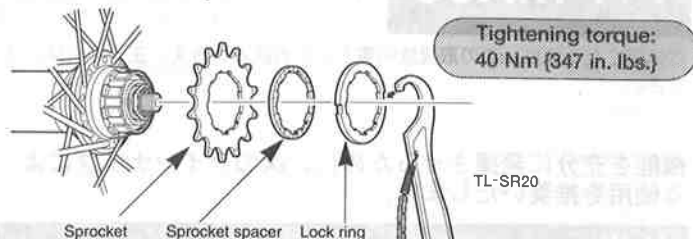

(Chain line 44,45 mm)

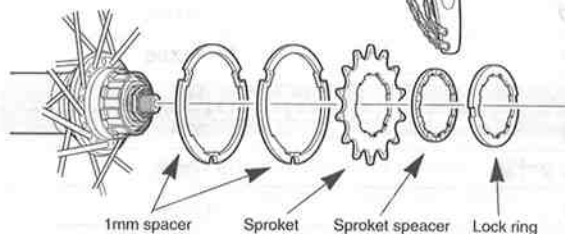

### Chain line Adjustment

Chain line	43 mm	44 mm	45 mm
1 mm spacer	—	1	2

## SHIMANO®

SHIMANO AMERICAN CORPORATION  
One Shimano Drive PO, Box 19615 Irvine California U.S.A. 92623-9615 Phone 714-951-5003

SHIMANO EUROPA

Industrieweg 24 NL-8071 CT Nunspeet Holland Phone 31-3412-72222

SHIMANO INC.

77 Oimatsucho 3-cho Sakai Osaka 590-77 Japan Phone 0722-23-3243

Please note: specifications are subject to change for improvement without notice. (English)  
© May, 1997 by Shimano Inc. XBC SZK Printed in Japan

These service instructions are printed on recycled paper and can be recycled again

