
GRX Dual Control Lever (For Disc Brake)

ST-RX715-R (1x12-speed)

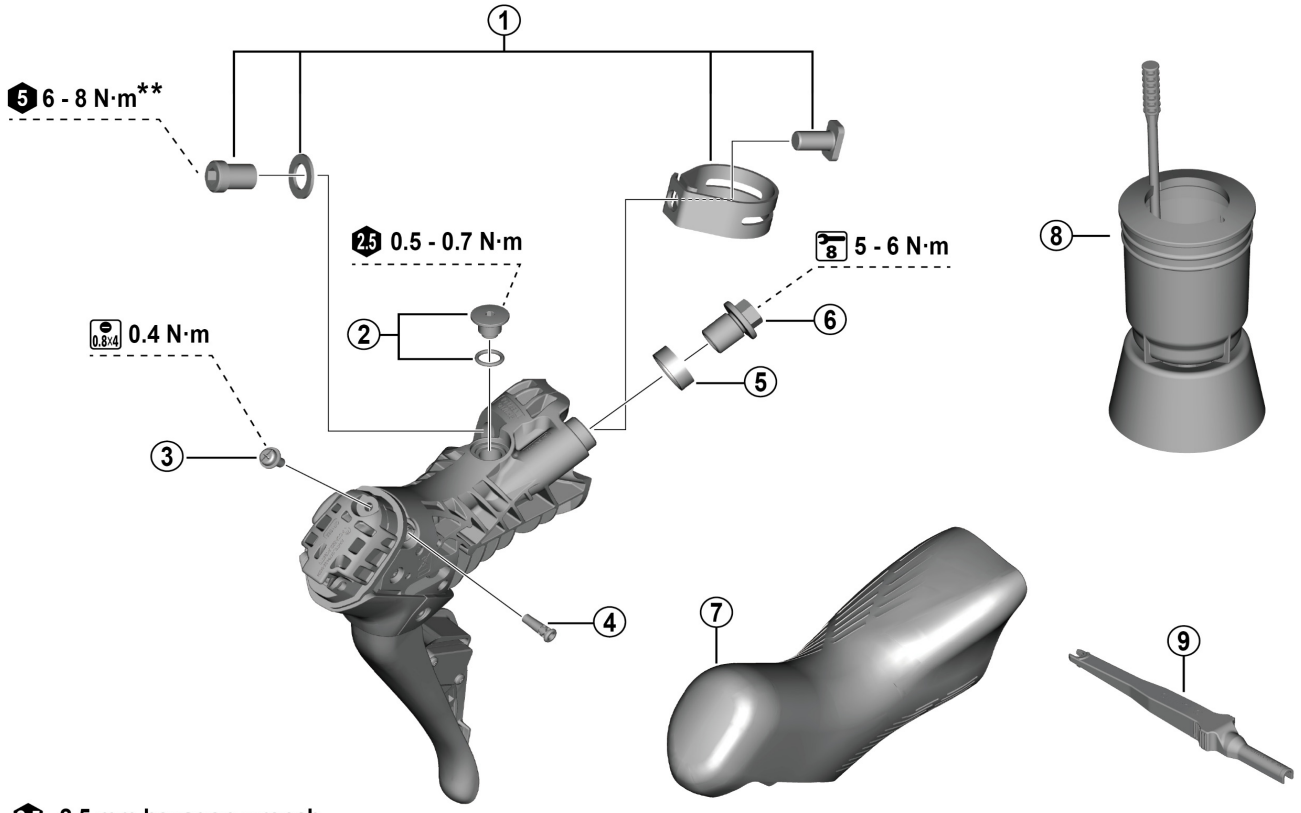

2.5 2.5 mm hexagon wrench

5 5 mm hexagon wrench

0.8×4 Slotted screwdriver (nominal dia. 0.8 × 4)

8 8 mm spanner

**** When installing parts onto a carbon frame/handlebar,**
confirm the recommended tightening torque with the carbon frame or handlebar manufacturer.
This will prevent damage to the frame/handlebar due to over-torquing or inadequate securing of the components.

ITEM NO.	SHIMANO CODE NO.	DESCRIPTION	INTERCHANGE-ABILITY ST-R7170	ST-R8170	ST-R9270
1	**Y0RM98030**	Clamp band unit diameter (23.8 - 24.2 mm)	A		
2	**Y0RM98020**	Bleed screw and O-ring	A	B	B
3	**Y0MX40000**	Battery holder fixing screw	A	A	A
4	**Y0RM9802T**	Dummy plug	A		
5	**Y0RM9801T**	Joint support ring	A	B	B
6	**Y8RD02000**	Flange flare nut (M9/black)	A	A	A
7	**Y0RM98010**	Bracket covers (pair)	A		
8	**Y13000090**	TL-BR002 Funnel unit for M7 screw	A	A	A
9	**Y7HE40000**	TL-EW300 Plug tool	A	A	A

A: Same parts.

B: Parts are usable, but differ in materials, appearance, finish, size, etc.

Absence of mark indicates non-interchangeability.

Jan.-2026-5121

© Shimano Inc. I

Specifications are subject to change without notice.

SHIMANO

FR
quefairedemesdechets.fr