

Dealer's Manual

ROAD	GRAVEL	MTB
E-BIKE	LIFESTYLE	GENERAL

Crankset

SHIMANO CUES Bottom Bracket

FC-U8000-1

FC-U8000-2

FC-U6000-1

FC-U6000-2

FC-U6000-2B

FC-U6010-2

FC-U4000-1

FC-U4000-2

FC-U4000-2B

FC-U4010-2

FC-U4010-2B

BB-MT801

BB-MT800-PA

BB-MT501

BB-MT500-PA

BB-UN300

BB-UN101

BB-UR400

Contents

IMPORTANT NOTICE.....	3
TO ENSURE SAFETY.....	4
List of tools to be used	9
Installation/removal	10
Combination of crankset and bottom bracket	10
Installing/removing the bottom bracket	10
Installing/removing the crankset	23
Maintenance.....	34
Replacing the chainring.....	34
Installing the chain guard	40




IMPORTANT NOTICE

- This dealer's manual is intended primarily for use by professional bicycle mechanics.
Users who are not professionally trained for bicycle assembly should not attempt to install the components themselves using the dealer's manuals.
If any part of the information on the manual is unclear to you, do not proceed with the installation. Instead, contact your place of purchase or a distributor for assistance.
- Make sure to read all manuals included with each product.
- Do not disassemble or modify the product other than as stated in the information contained in this dealer's manual.
- All manuals and technical documents are accessible online at <https://si.shimano.com> .
- For consumers who do not have easy access to the internet, please contact a SHIMANO distributor or any of the SHIMANO offices to obtain a hardcopy of the user's manual.
- Please observe the appropriate rules and regulations of the country, state or region in which you conduct your business as a dealer.

For safety, be sure to read this dealer's manual thoroughly before use, and follow it for correct use.


The following instructions must be observed at all times in order to prevent personal injury and physical damage to equipment and surroundings.

The instructions are classified according to the degree of danger or damage which may occur if the product is used incorrectly.

 DANGER	Failure to follow the instructions will result in death or serious injury.
 WARNING	Failure to follow the instructions could result in death or serious injury.
 CAUTION	Failure to follow the instructions could cause personal injury or physical damage to equipment and surroundings.

TO ENSURE SAFETY

WARNING

- Be sure to follow the instructions provided in the manuals when installing the product.
Only use SHIMANO genuine parts. If a component or replacement part is incorrectly assembled or adjusted, it can lead to component failure and cause the rider to lose control and crash.
-  Wear approved eye protection while performing maintenance tasks such as replacing components.

Be sure to also inform users of the following:

- Never use alkali- or acid-based solvents such as rust cleaners. If those solvents are used the chain might break and cause serious injury.
- Clean the chain with an appropriate chain cleaner regularly. Intervals between maintenance depend on the use and riding circumstances.
- Check that there are no cracks in the crank arms before riding the bicycle. If there are any cracks, the crank arm may break and you may fall off the bicycle.
- Be careful not to let the hemming of your clothes get caught in the chain while riding. Otherwise, you may fall off the bicycle.
- Check the chain for any damage (deformation or cracking), skipping, or other abnormalities such as unintended gear shifting. If any problems are found, consult your place of purchase or a distributor. The chain may break, and you may fall.

For installation to the bicycle and maintenance

- Install the inner cover correctly. If it is not installed correctly, the axle may rust and become damaged, and the bicycle may fall over and serious injury may occur as a result.
- The two left crank arm screws should be tightened alternately in stages rather than each fully tightened at once. Use a torque wrench to check that the tightening torques are within the range of 12 - 14 N·m. Also, after riding approximately 100 km (60 miles), use a torque wrench to re-check the tightening torques. Thereafter, continue to check the tightening torques periodically. If the tightening torques are too weak or if the mounting screws are not tightened alternately in stages, the left crank arm may come off and the bicycle may fall over, and serious injury may occur as a result.
- Re-checking the tightening torque of the crank arm is necessary when the crank arm is subjected to strong blows from a fall. If riding when the tightening torque is weak due to a strong blow, the crank arm could detach and you may fall off the bicycle.

 **CAUTION**



Be sure to also inform users of the following:

- Be careful not to touch the teeth of chainrings. There is a danger of injury.

NOTICE

Be sure to also inform users of the following:

- Be sure to keep turning the crank arm during the shift lever operation.
- When the chain is in any of the positions shown in the figures, the chain may come into contact with the chainring or front derailleur and generate noise. If noise is a problem, shift the chain onto the next largest sprocket or the one after it.

	Double
Chainring	
Sprocket	

- Check that there is no excess play or looseness in any fastening sections before riding the bicycle. Also, be sure to retighten the crank arm and pedals at periodic intervals.
- Use a neutral detergent to clean the crank arms and the bottom bracket. Using alkaline or acidic detergents may cause discoloration.
- If pedaling performance does not feel normal due to an abnormal noise, etc., contact your place of purchase.
- Do not wash the surrounding area of the bottom bracket with a high-pressure wash. Water may enter the bearing section and cause noise or adhesion.
- If you feel any excess play in the bearing section, the bottom bracket should be replaced.
- The chainrings should be periodically washed with a neutral detergent. In addition, cleaning the chain with neutral detergent and lubricating it can be an effective way of extending the life of the chainrings and the chain.
- The cuffs of your clothing may get dirty from the chain while riding.
- This product is not warrantied against damage caused by improper use, abuse, or issues resulting from a crash, unless the circumstance was caused by a manufacturing problem.
- Products are not guaranteed against natural wear and deterioration from normal use and aging.
- For maximum performance we highly recommend SHIMANO lubricants and maintenance products.

For installation to the bicycle and maintenance

- When installing the pedals, apply a small amount of grease to the threads to prevent the pedals from seizing. Use a torque wrench to securely tighten the pedals. Tightening torque is 35 - 55 N·m. The right crank arm has a right-hand thread, and the left crank arm has a left-hand thread.
- If the bottom bracket shell is not parallel, gear shifting performance will drop.
- If the chain keeps coming off the gears during use, replace the chainrings and the chain.
- When installing the left- and right-hand cups, apply grease and be sure to install the inner cover. Otherwise,

TO ENSURE SAFETY

the waterproofing performance will worsen.

- To ensure the best performance, be sure to use only the recommended type of chain.

Crankset	Recommended chain
FC-U8000	CN-HG701-11
FC-U6000 / FC-U6010 / FC-U4000 / FC-U4010	CN-LG500

- If a squeaking noise is heard coming from the bottom bracket axle and the left crank arm connector, apply grease to the fastening section, then tighten it to the specified torque.
- Only use chainring combinations listed below. If other chainring combinations are used, it can create poor shifting and cause the chain to jam, resulting in damage to the bicycle.

		Top	
		46T BM	
Low	FC-U8000-2 FC-U6010-2	32T BM	X

		Top	
		46T BN	36T BK
Low	FC-U6000-2 / 2B	30T BN	X
		22T BK	-
			X

		Top		
		46T	40T	36T
Low	FC-U4010-2 / 2B	30T	X	-
		26T	-	X
		22T	-	-
				X

		Top	
		40T	36T
Low	FC-U4000-2 / 2B	26T	X
		22T	-
			X

Single gear	FC-U8000-1	FC-U6000-1	FC-U4000-1
42T	X	X	X
40T	X	X	X
32T	-	X	X
30T	-	X	X






















TO ENSURE SAFETY

- Be sure to use only the applicable chain and bottom bracket.
- Apply grease to the bottom bracket before installing it.
- If you feel any excess play in the bottom bracket axle, the bottom bracket should be replaced.

The actual product may differ from the illustration because this manual is intended mainly to explain the procedures for using the product.

List of tools to be used

The following tools are needed for installation, adjustment, and maintenance purposes.

Tool			
	4 mm hexagon wrench		TL-FC18
	5 mm hexagon wrench		TL-FC25
	8 mm hexagon wrench		TL-FC32
	Cross head screwdriver [#2]		TL-FC33
	17 mm spanner		TL-FC36
	Soft face mallet		TL-FC37
	Adjustable wrench		TL-BB12
	TL-FC10		TL-BB13
	TL-FC11		TL-UN66
	TL-FC15		TL-UN74-S
	TL-FC16		

Installation/removal

Combination of crankset and bottom bracket

Use the crankset and bottom bracket in the combinations shown below.





Crankset	Bottom bracket		
	BB-MT801 / BB-MT501 / BB-UR400	BB-MT800-PA / BB-MT500-PA	BB-UN300 / BB-UN101
FC-U8000-1 / FC-U8000-2 / FC-U6000-1 / FC-U6000-2 / FC-U6000-2B / FC-U6010-2 / FC-U4010-2 / FC-U4010-2B	X	X	-
FC-U4000-1 / FC-U4000-2 / FC-U4000-2B	-	-	X

Installing/removing the bottom bracket

Tool combination chart




The tools required for installing and removing the bottom bracket differ by model. Combine and use any of the tools specified in the table.

BB-MT801

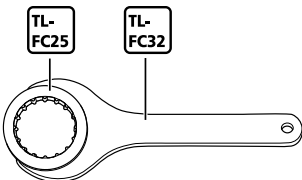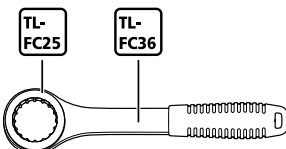TL-FC25 & TL-FC32	TL-FC25 & TL-FC33
	
TL-FC25 & TL-FC36	TL-FC37
	



Installation/removal
Installing/removing the bottom bracket

BB-MT501 / BB-UR400

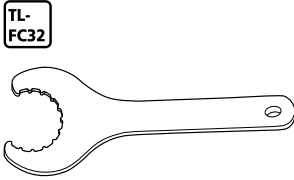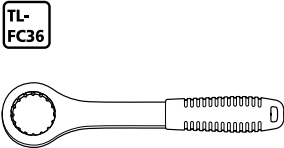TL-FC32	TL-FC33
 <p>TL-FC32</p> <p>A line drawing of a wrench with a curved, serrated head and a long handle with a hole at the end.</p>	 <p>TL-FC33</p> <p>A line drawing of a circular seal with a square hole in the center and a serrated outer edge.</p>
TL-FC36	
 <p>TL-FC36</p> <p>A line drawing of a wrench with a circular head and a long handle with a serrated section near the end.</p>	

NOTICE

- When using an impact wrench on BB-MT801, use it in combination with TL-FC37. Using any other combinations will damage the tool.
- TL-FC25 may become damaged and unusable after repeated use.
- Check the possible installation positions when setting TL-FC25 in TL-FC32.



- Any installation position is possible for TL-FC33 / FC36.

Installation/removal

Installing/removing the bottom bracket

Installation

Installation/removal

Installing/removing the bottom bracket


2-PIECE CRANKSET type

Installation/removal

Installing/removing the bottom bracket



1. Place the spacers.

- (1) Measure the width of the bottom bracket shell.




- (2) Prepare the required spacers (2.5 mm) as indicated in the table.



BB-MT801 / BB-MT501

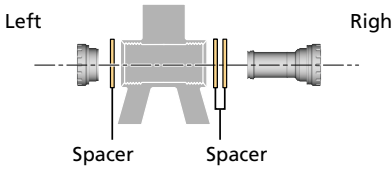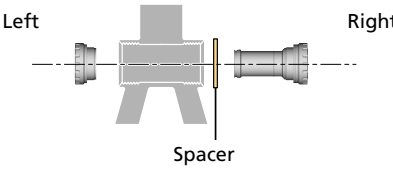Bottom bracket shell width	
68 mm	73 mm
	

BB-UR400

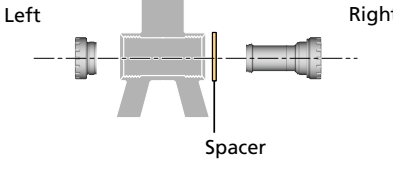Bottom bracket shell width	
68 mm	
	

Chain case stay type

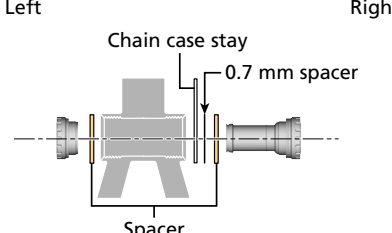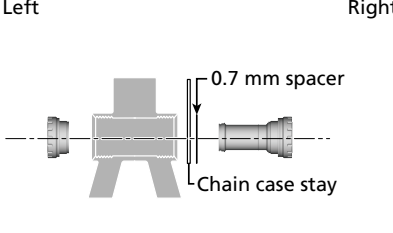
Bottom bracket shell width	
68 mm	73 mm
	

NOTICE

- BB-UR400 is not compatible with a bottom bracket shell width of 73 mm.
- If not using a chain case, use a 1.8 mm spacer.

TECH TIPS

- If using a band type front derailleur and a bottom bracket shell having a width of 68 mm, install the three spacers so that there are two on the right and one on the left as shown in the figure. A 1.8 mm spacer and 0.7 mm spacer can be used together instead of a 2.5 mm spacer.

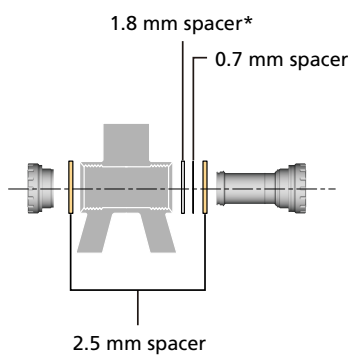



* 1.8 mm corresponds to the thickness of the chain case.

Installation/removal

Installing/removing the bottom bracket

2. Install the inner cover, cups, and spacers.


- (1) Apply grease to the left- and right-hand cups.
- (2) Use the SHIMANO original tools (refer to " Tool combination chart " in "Installing/removing the bottom bracket") to tighten the left- and right-hand cups.

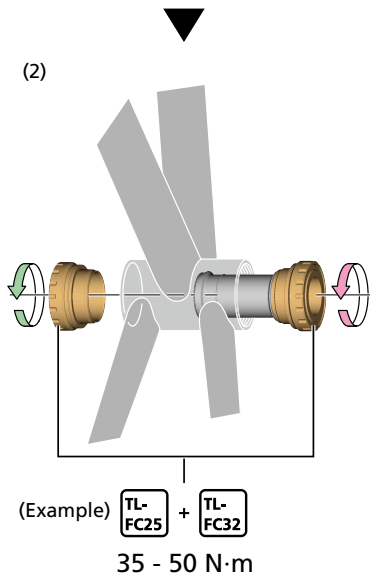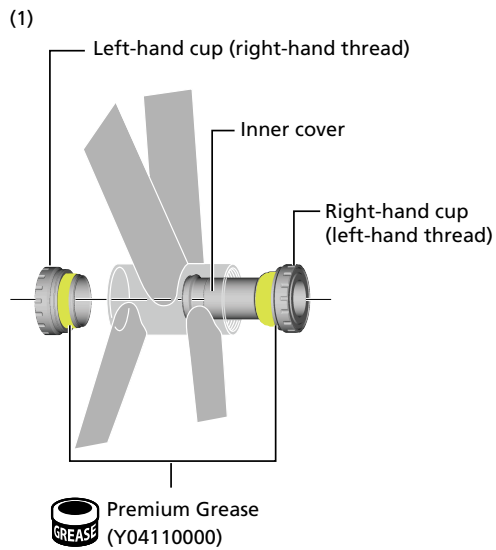

Square type

1. Install the main body and cup.

First install the main body using the SHIMANO original tool, then the cup.

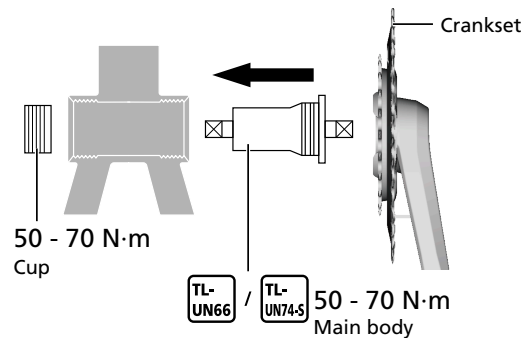

NOTICE

- If the main body and cups are aluminum or steel, apply grease to them.



Apply grease:
Premium Grease (Y04110000)


- If the main body and cups are plastic, do not apply grease to them.



Press-fit bottom bracket

1. Set the bottom bracket in the bottom bracket shell.


- (1) Measure the width of the bottom bracket shell.



- (2) Prepare a spacer (2.5 mm) for the position shown below.

Bottom bracket shell width	
89.5 mm	92 mm
<p>Left</p> <p>Right-hand cup</p> <p>Right</p> <p>Inner cover</p> <p>Spacer</p> <p>The diagram shows a side view of the bottom bracket assembly for a shell width of 89.5 mm. From left to right, it shows a left cup, the bottom bracket shell, an inner cover, a yellow spacer, and a right cup. Labels with arrows point to each component.</p>	No spacer needed


- (3) Set the inner cover and cups.



Installation/removal

Installing/removing the bottom bracket

2. Insert the SHIMANO original tool into the bottom bracket.




Installation/removal

Installing/removing the bottom bracket

3. Use the specified spanner and hexagon wrench to press-fit the bottom bracket.

Make sure that the contact surface of the bottom bracket is parallel with the contact surface of the bottom bracket shell.

* Press-fit until there is no more gap between the bottom bracket and the bottom bracket shell.



Removal


Threaded bottom bracket / square type

1. Perform the removal in the reverse order from " Installation " in "Installing/removing the bottom bracket."


Press-fit bottom bracket

1. Insert the SHIMANO original tool into the bottom bracket.


- (1) Extend the flaps to taper the tip of the SHIMANO original tool.
- (2) Insert the SHIMANO original tool from the opposite side of the cup you wish to remove.
- (3) As shown in the figure, press down on the protruding portion of the tip with your hand to expand the flaps.
- (4) Push the tool in further while continuing to press down on the tip, until the collar on the flaps engages with the cup.

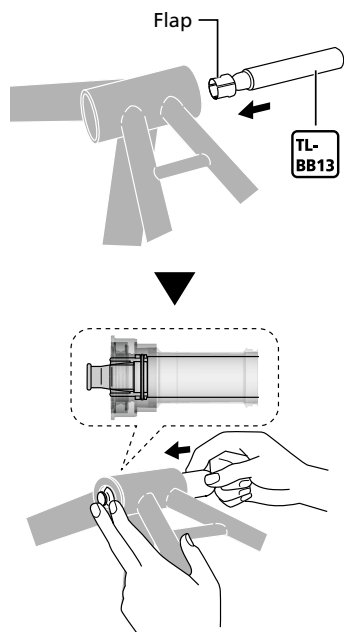

2. Tap the SHIMANO original tool with a soft face mallet to push out the cup.

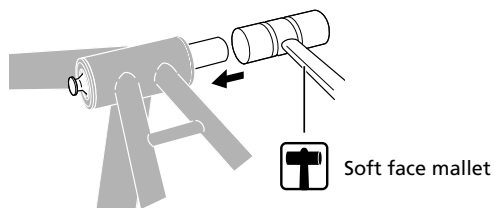

3. Remove the cup on the opposite side in a similar manner.



NOTICE

- Do not reuse the cups as they can be damaged during removal.

Installing/removing the crankset


Installation

Refer to "Combination of crankset and bottom bracket" in "Installation / removal" for the bottom bracket to use.


FC-U6000-1 / FC-U6000-2 / FC-U6000-2B / FC-U4010-2 / FC-U4010-2B

1. **Completely tighten the adjustment nut of the left crank arm.**

Turn the adjustment nut so it is tight against the left crank arm.




2. Fully insert the left crank arm until it touches the bottom bracket.

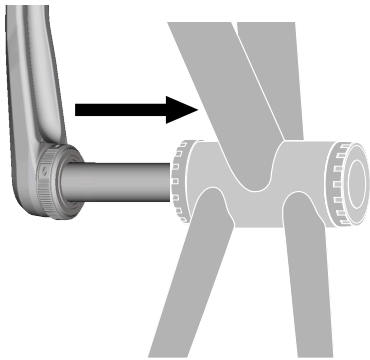


3. Set the right crank arm unit onto the axle of the left crank arm.

As shown in the figure, be sure to set the left and right crank arms so that they are aligned.

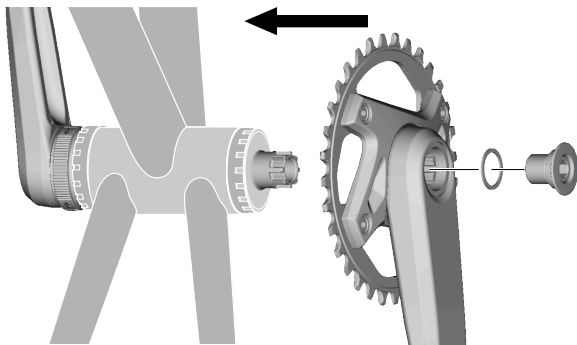


4. Tighten the fixing screw of the right crank arm unit.

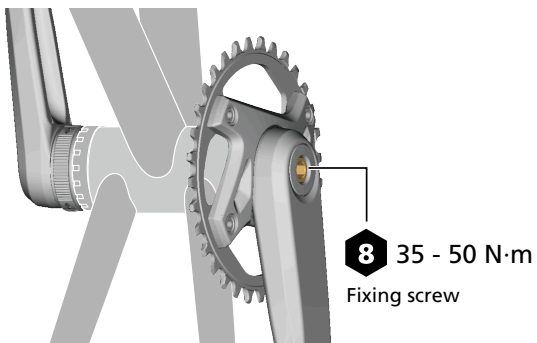


5. Insert the right crank arm unit until it securely touches the bottom bracket.

* Confirm that there is no gap between the right crank arm unit and the bottom bracket.

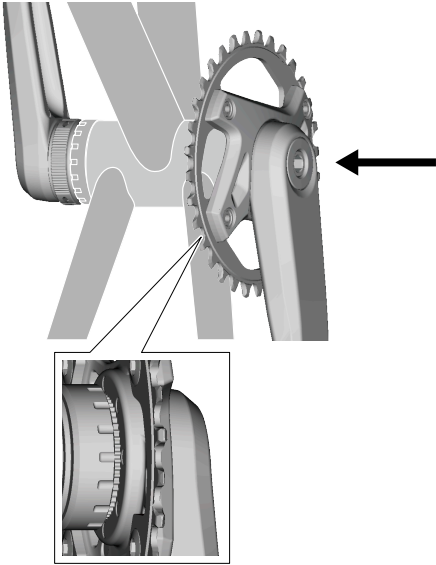


6. Turn the adjustment nut of the left crank arm to remove any excess play between the crank arm and bottom bracket.

* Turn the adjustment nut directly by hand or by inserting a tool such as a thin hexagon wrench into one of the holes. Confirm that there is no gap between the adjustment nut and the bottom bracket.

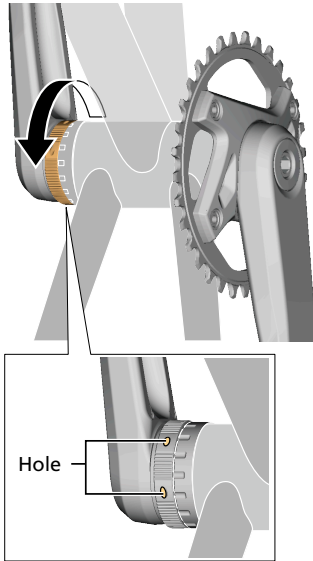


FC-U8000-1 / FC-U8000-2 / FC-U6010-2

1. Fully insert the right crank arm unit until it touches the bottom bracket.

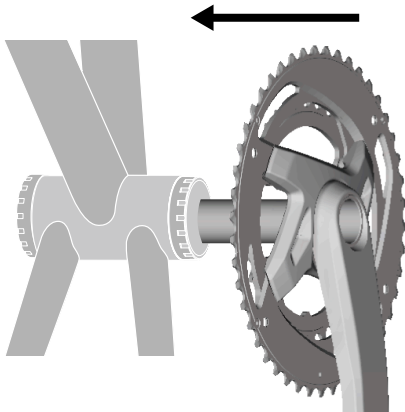


2. Set the left crank arm onto the axle of the right crank arm unit.

- (1) Apply grease to the axle of the right crank arm unit.
- (2) Align the wide section of the left crank arm spline with the wide section of the spline on the axle of the right crank arm unit.

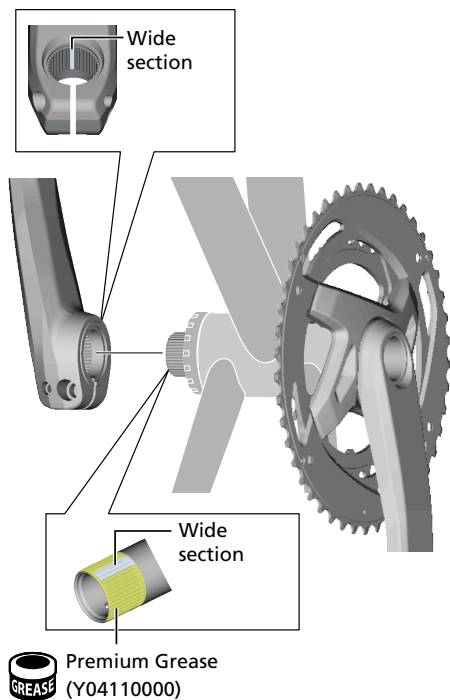



3. Install the cap.

- (1) Apply grease to the cap as specified in the figure.
- (2) Tighten using the SHIMANO original tool.

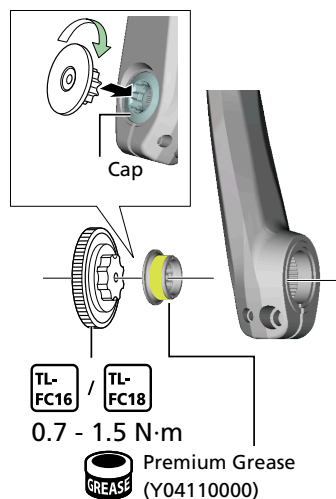

4. Tighten the mounting screws to secure the crank arm.

- (1) Set the stopper plate in the direction shown in the figure and push it in.
- (2) Check that the plate pin is securely inserted.
- (3) Tighten the left crank arm screws alternately until the 2 screws reach the specified torque.

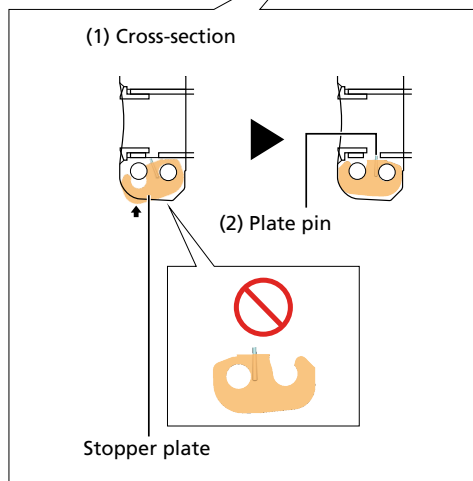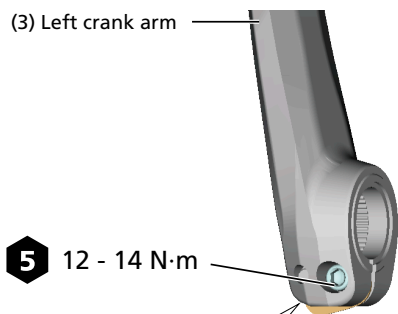


TECH TIPS

- Confirm that there is no gap or excess play between the crank arm and the bottom bracket, and perform the operation from step 3 again if there is.

FC-U4000-2 / FC-U4000-2B / FC-U4000-1

Install the crankset using a hexagon wrench.

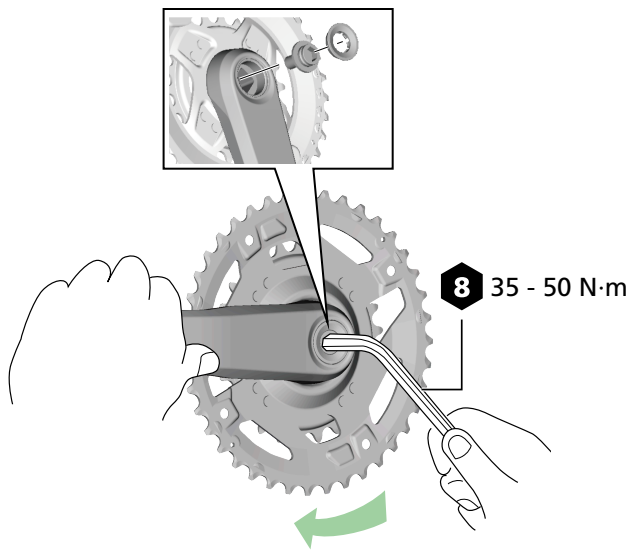


Removal

FC-U6000-1 / FC-U6000-2 / FC-U6000-2B / FC-U4010-2 / FC-U4010-2B


1. Loosen the fixing screw of the right crank arm unit.

Use an 8 mm hexagon wrench to remove the fixing screw and washer.

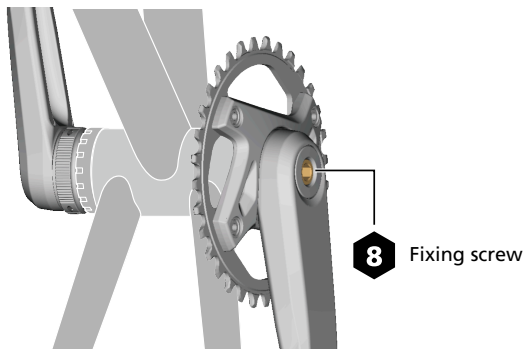

2. Install the SHIMANO original tool to the right crank arm unit.


- (1) Loosen the screw of the SHIMANO original tool before installing it to the right crank arm unit.
- (2) Use an adjustable wrench to install the SHIMANO original tool to the right crank arm unit.

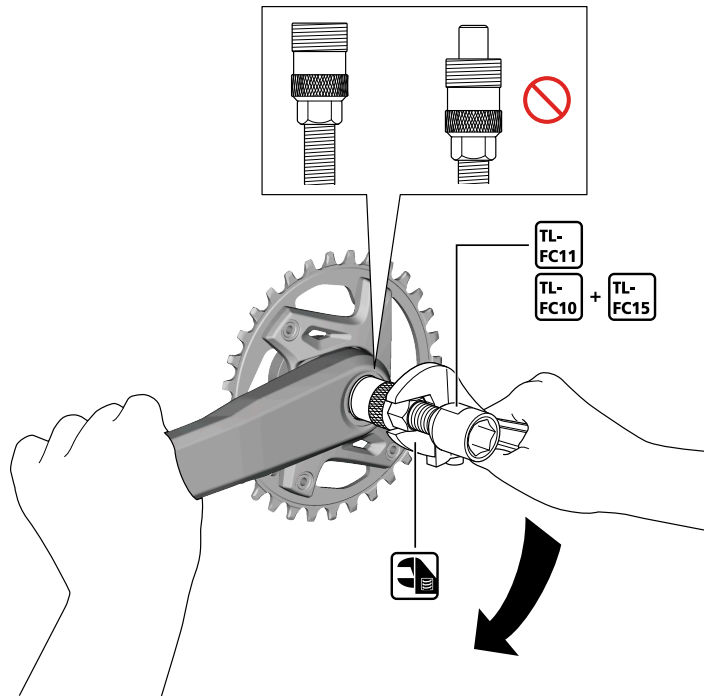


3. Remove the right crank arm unit from the axle.

When tightened with the SHIMANO original tool and an adjustable wrench or an 8 mm hexagon wrench, the right crank arm unit comes off the axle.

When using a hexagon wrench

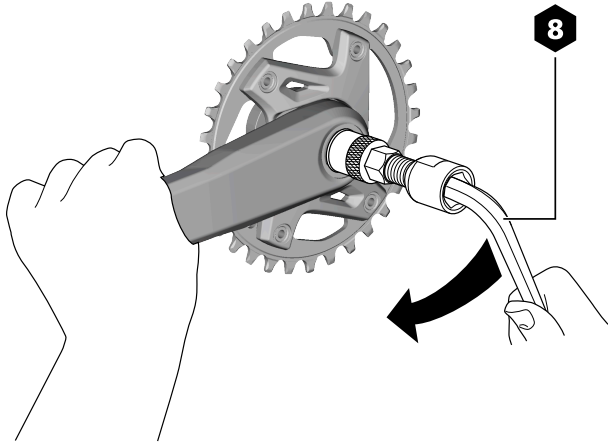

When using an adjustable wrench

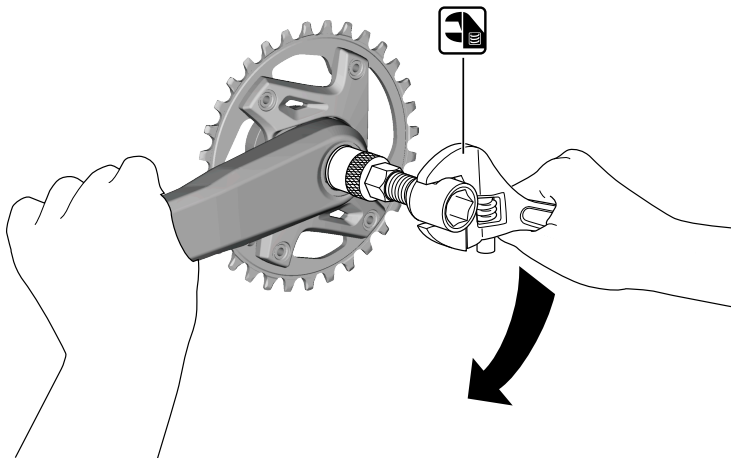

4. Remove the left crank arm from the bottom bracket.


FC-U8000-1 / FC-U8000-2 / FC-U6010-2

1. Perform the removal in the reverse order from "Installation" in "Installing/removing the crankset."

FC-U4000-2 / FC-U4000-2B / FC-U4000-1


1. Loosen the fixing screw of the crankset.

After loosening the fixing screw with an 8 mm hexagon wrench, the crankset can be removed from the bottom bracket axle.

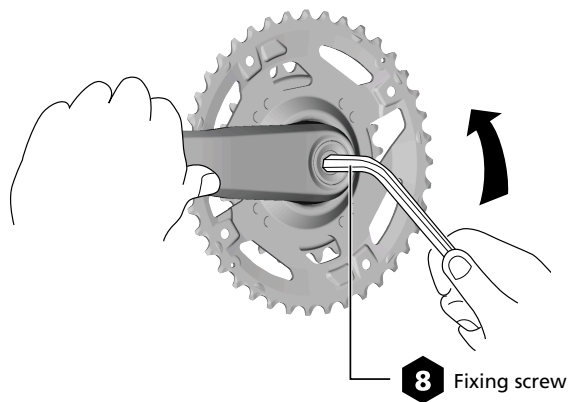

TECH TIPS

- If the crankset cannot be removed even after removing the fixing screw, use the adjustable wrench and the SHIMANO original tool.

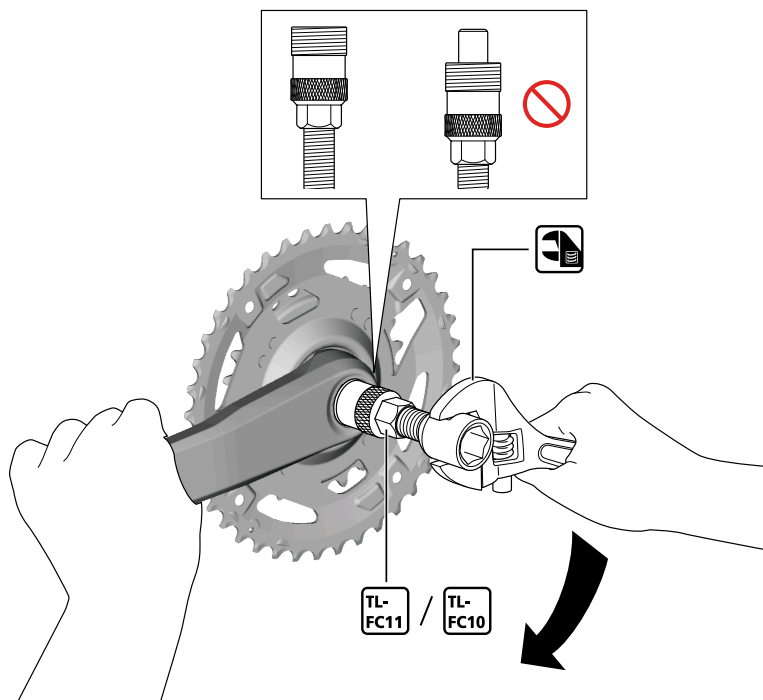

Maintenance

Replacing the chainring

Perform the steps of the removal procedure for chainring replacement in the reverse order from the installation procedure.

NOTICE

- Gear shifting performance will be reduced if the installation positions of the chainrings are incorrect. Be sure to install the chainrings in the correct positions.
- Make sure to use the correct combination of SHIMANO genuine parts, otherwise the crank arms or chainrings may become damaged.


Single chainring type

FC-U8000-1 / FC-U6000-1

1. **Remove the chainrings from the crank arm.**

2. Install the chainring on the crank arm.

With the side with the tooth number marking facing outward, secure it with chainring mounting screws.

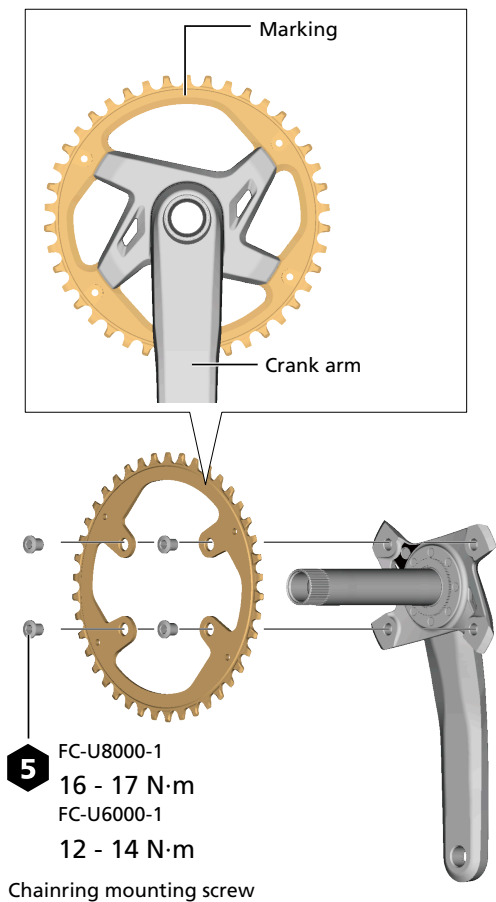

NOTICE


- The chainring cannot be replaced for the FC-U4000-1.

Double chainring type

FC-U8000-2

1. Install the largest chainring.

Set the largest chainring with the marked side facing inward.

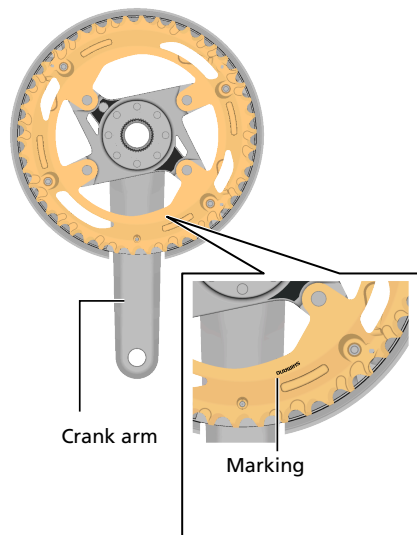


TECH TIPS

- Do not ride the bicycle with the chain guard removed.

2. Install the smallest chainring.

With the marked side facing inward, set the smallest chainring so that the alignment tab is positioned under the crank arm.

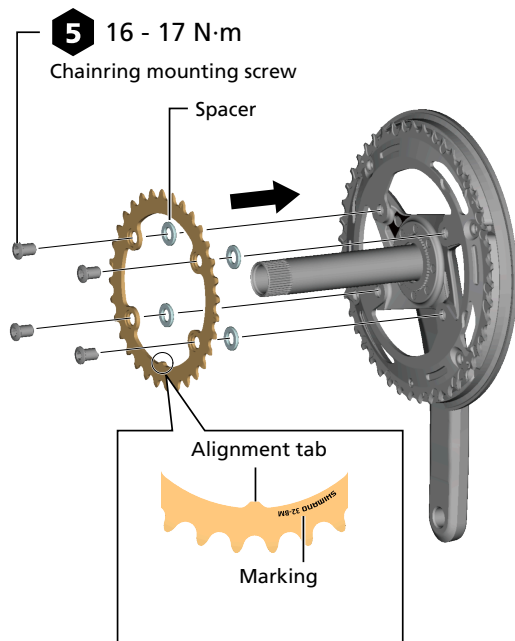

FC-U6010-2 / FC-U6000-2 / FC-U6000-2B




1. Remove the chainrings from the crank arm.

Maintenance

Replacing the chainring


2. Install the largest chainring on the crank arm.

Ensure the marked side is facing outwards, and that the chain drop prevention pin is positioned under the crank arm.

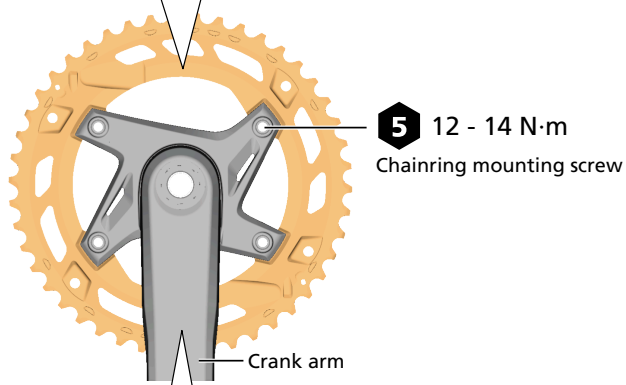

3. Install the smallest chainring.

- (1) With the marked side facing inward, set the smallest chainring so that the alignment tab is positioned under the crank arm.
- (2) Secure it using the chainring mounting screws.

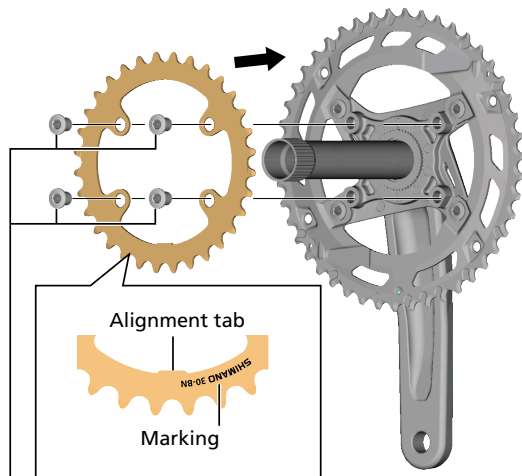

5 12 - 14 N·m
16 - 17 N·m (22T)

Chainring mounting screw

NOTICE

- The chainring cannot be replaced for the FC-U4010-2 / FC-U4010-2B / FC-U4000-2 / FC-U4000-2B.

Installing the chain guard

FC-U8000-2 / FC-U6000-1 / FC-U6000-2 / FC-U6000-2B / FC-U6010-2 / FC-U4000-1/
FC-U4010-2/ FC-U4010-2B


1. Install the chain guard to the largest chainring.

Pass the chain guard over the crank arm, then set the chain guard on the crank and chainring.



2. Install the chain guard.


Secure it using the mounting screws.

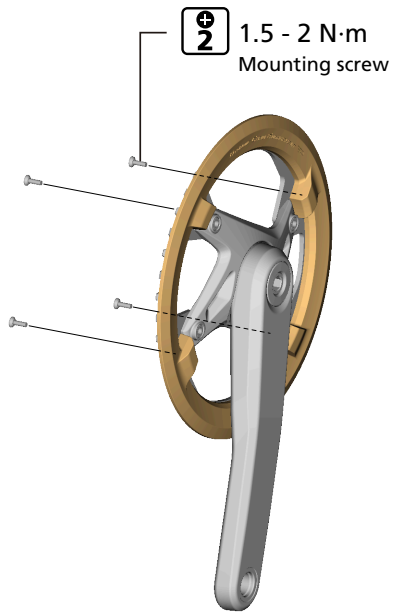

FC-U8000-1

1. Install the chain guard to the largest chainring.

Pass the chain guard over the crank arm, then set the chain guard on the crank and chainring.

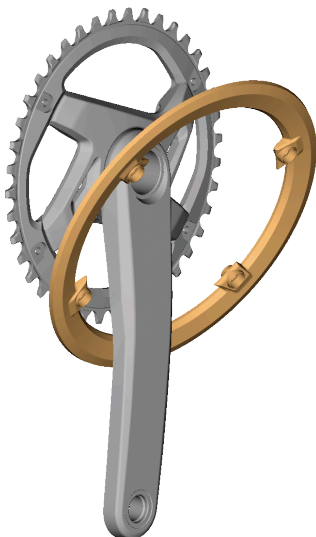


Maintenance

Installing the chain guard

2. Install the chain guard.

Secure it using the mounting screws.

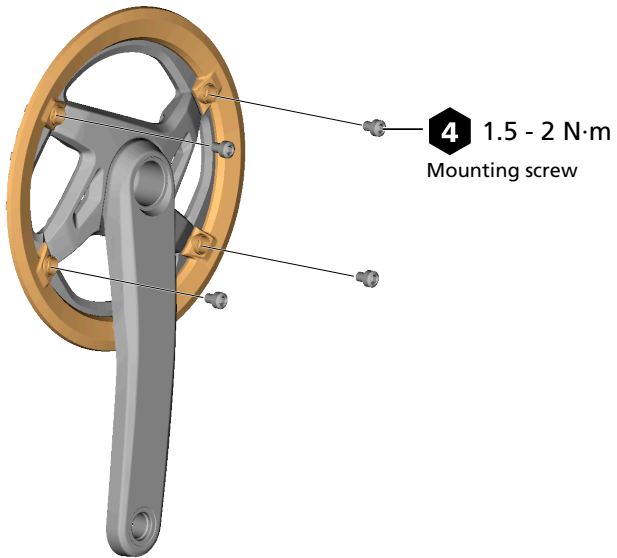

SHIMANO

SHIMANO NORTH AMERICA BICYCLE, INC.
One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003

SHIMANO EUROPE B.V.
High Tech Campus 92, 5656 AG Eindhoven, The Netherlands Phone: +31-402-612222

SHIMANO INC.
3-77 Oimatsu-cho, Sakai-ku, Sakai City, Osaka 590-8577, Japan

Please note: specifications are subject to change for improvement without notice. (English)
© Aug. 2022 by SHIMANO INC. ITP